

● ☆ ■ ▼ □ □ ❄️ ◆ ❄️ ▼ ❄️ □ ■


● ❄️ □ ❄️ ❄️ ❄️ ■ ▼ ❄️ ❄️ ● ▲ ❄️ □ □ ▲ ◆ □ ❄️


● ❄️ ❄️ ❄️ ■ ❄️ □ ❄️ ❄️ ○ ❄️ ■


● ☆ ❄️ ❄️ ❄️ ● ❄️ ☾ ❄️ □ ❄️

● ❄️ ❄️ ▲ ▼ □ □ ❄️ ❄️ ▼ ❄️ ❄️ ❄️ ▲

● ❄️ □ ■ ❄️ ● ◆ ▲ ❄️ □ ■

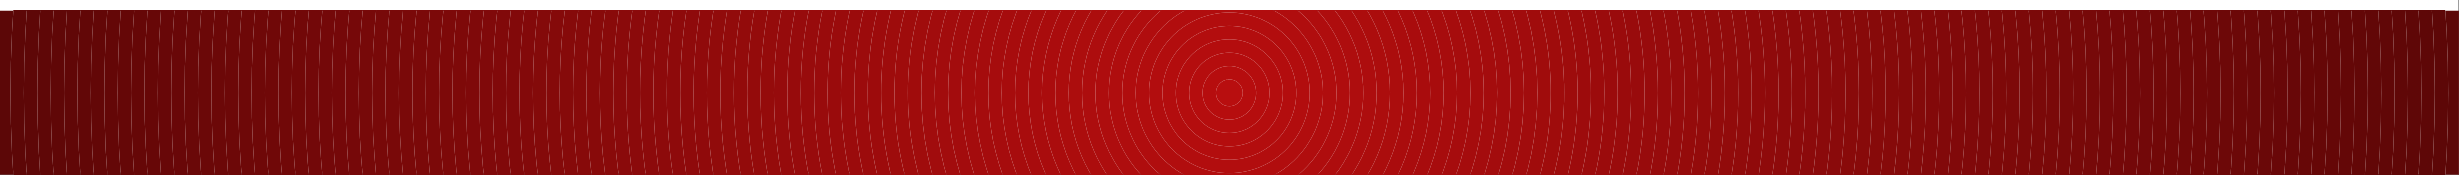

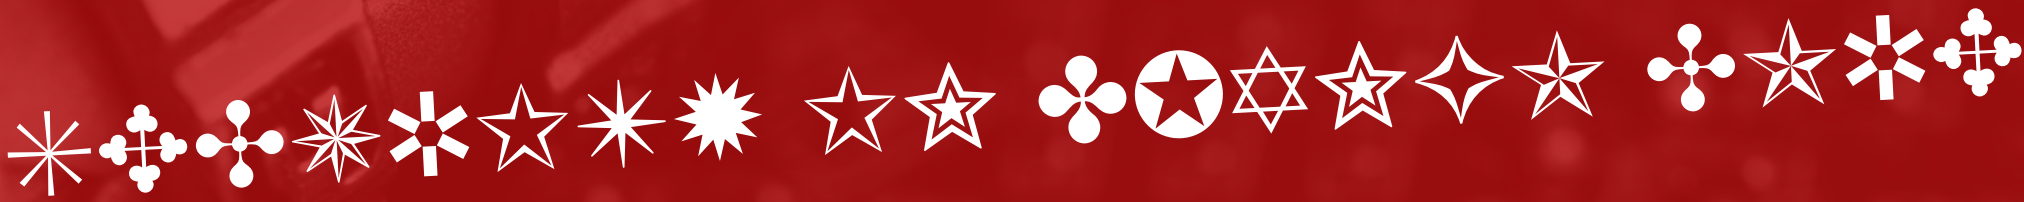

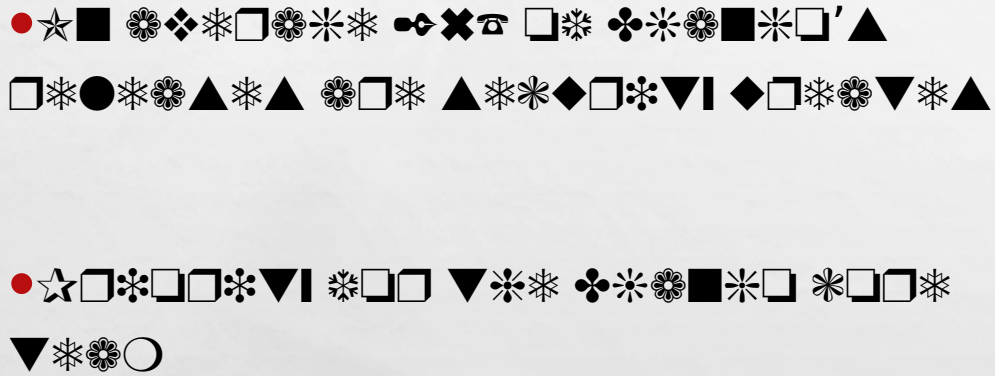

pyconza

pyconza

__init__.py



asgi.py

settings.py

urls.py

wsgi.py

manage.py

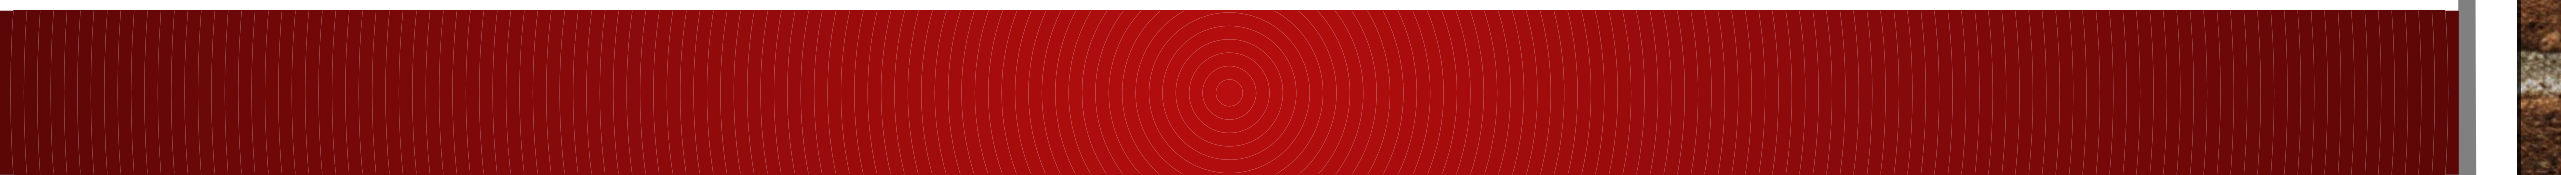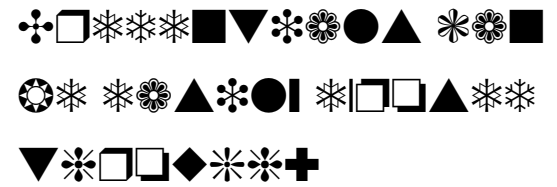

```
Month code Please 8
Traceback (most recent call last):
  File "main.py", line 13, in <module>
    src() # Calling working function
  File "main.py", line 11, in src
    decodemth(monthcode) # Calls the decodemth function
  File "main.py", line 5, in decodemth
    print (mthdesc[mm]) # calls table, decodes, prints
IndexError: list index out of range
```



```
pyconza > pyconza > setti
71
72
73 # Database
74 # https://docs.djar
75
76 DATABASES = {
77     'default': {
78         'ENGINE': 'django.db.backends.sqlite3',
79         'NAME': BASE_DIR / 'db.sqlite3',
80     }
81 }
82
83
```

```
# SECURITY WARNING: keep the secret key used in p
SECRET_KEY = 'django-insecure-^8jj86*q6x!i=r-v5qc

# SECURITY WARNING: don't run with debug turned o
DEBUG = True

ALLOWED_HOSTS = []

# Application definition

INSTALLED_APPS = [
```






```
from django.contrib import admin
from django.urls import path


urlpatterns = [
    path('admin/', admin.site.urls),
]
```



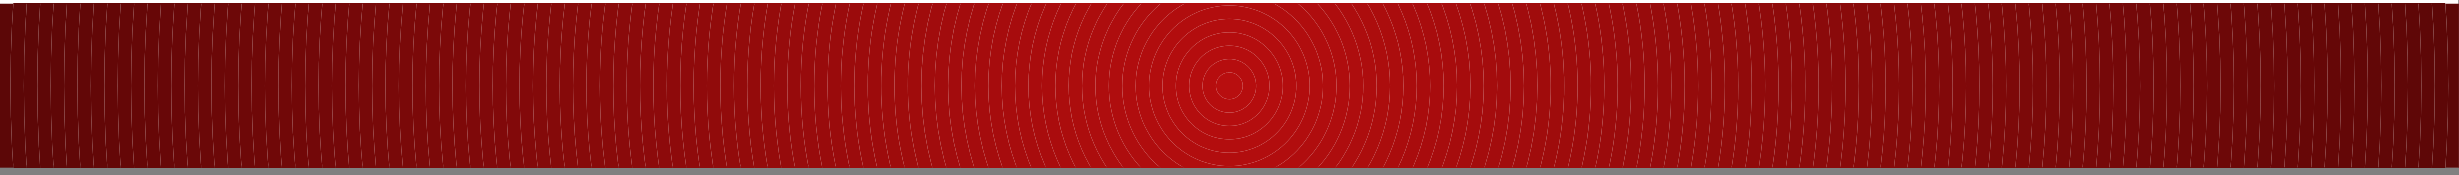




Middleware is a framework that hooks into Django's request/response processing. It's a light, low-level "plugin" system for globally altering Django's input or output.








```
MIDDLEWARE = [  
    'django.middleware.security.SecurityMiddleware',  
    'django.contrib.sessions.middleware.SessionMiddleware',  
    'django.middleware.common.CommonMiddleware',  
    'django.middleware.csrf.CsrfViewMiddleware',  
    'django.contrib.auth.middleware.AuthenticationMiddleware',  
    'django.contrib.messages.middleware.MessageMiddleware',  
    'django.middleware.clickjacking.XFrameOptionsMiddleware',  
]
```

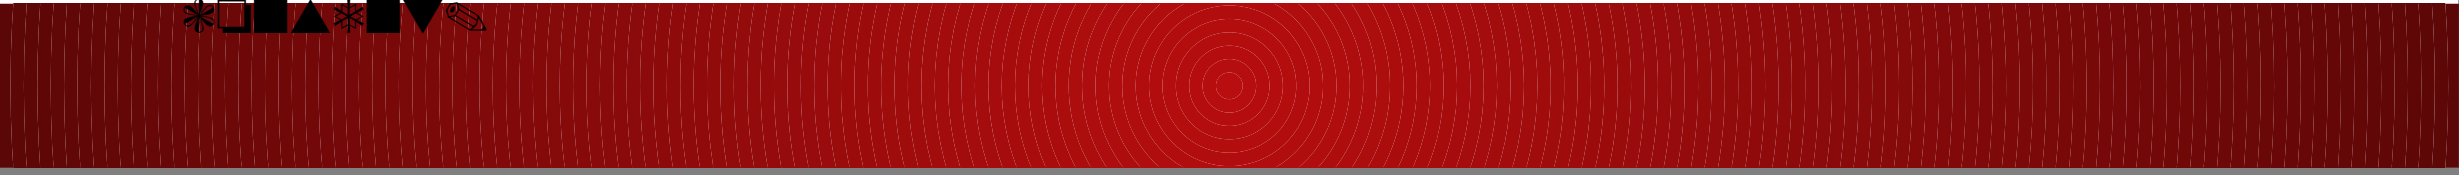

```
'django.middleware.security.SecurityMiddleware',  
'django.contrib.sessions.middleware.SessionMiddleware',  
'django.middleware.common.CommonMiddleware',  
'django.middleware.csrf.CsrfViewMiddleware',  
'django.contrib.auth.middleware.AuthenticationMiddleware',  
'django.contrib.messages.middleware.MessageMiddleware',
```



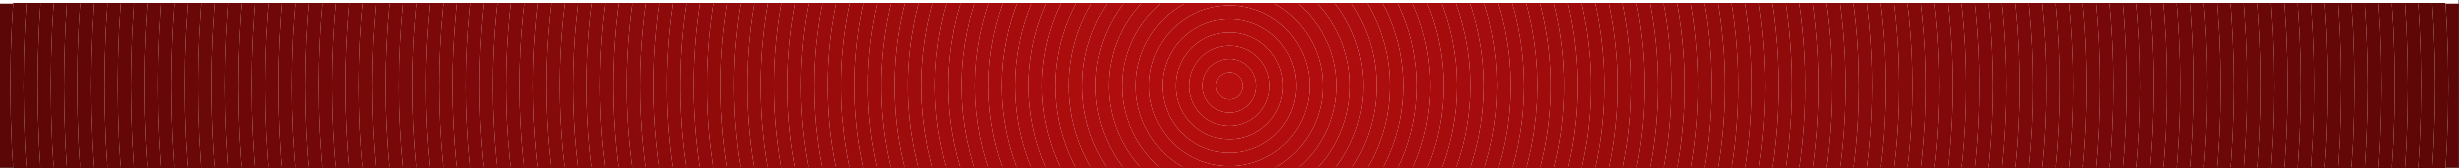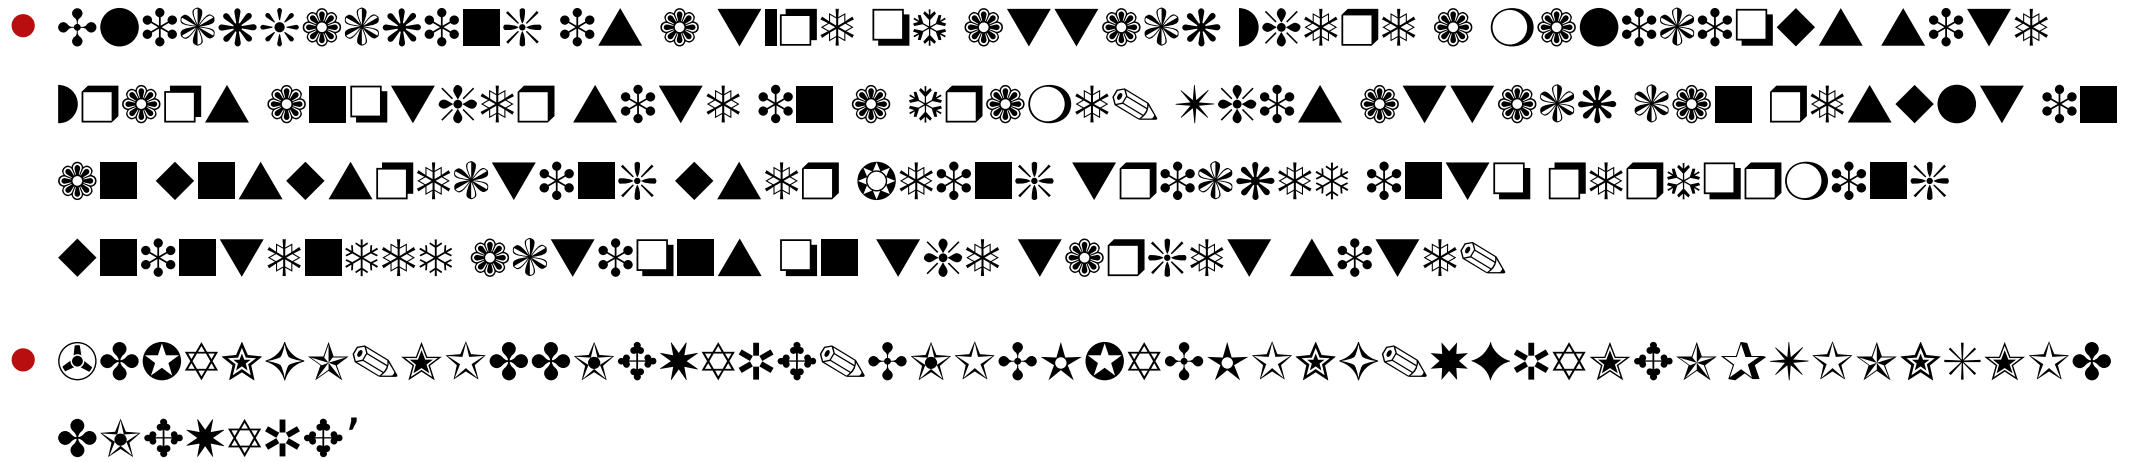

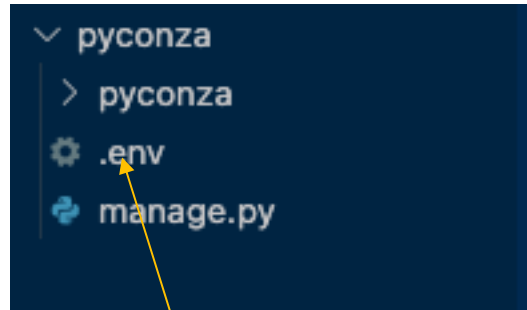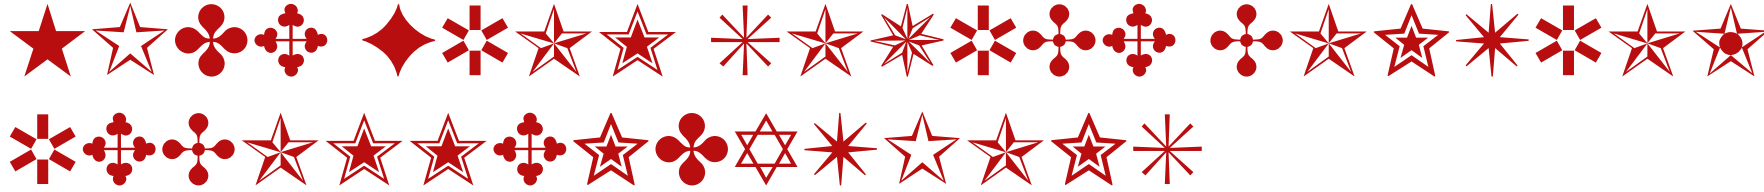

```
from dotenv import load_dotenv
load_dotenv() # loads the configs from .env
```

```
# SECURITY WARNING: keep the secret key used in production secret!
SECRET_KEY = str(os.getenv('SECRET_KEY'))

# social auth configs for github
SOCIAL_AUTH_GITHUB_KEY = str(os.getenv('GITHUB_KEY'))
SOCIAL_AUTH_GITHUB_SECRET = str(os.getenv('GITHUB_SECRET'))

# social auth configs for google
SOCIAL_AUTH_GOOGLE_OAUTH2_KEY = str(os.getenv('GOOGLE_KEY'))
SOCIAL_AUTH_GOOGLE_OAUTH2_SECRET = str(os.getenv('GOOGLE_SECRET'))
```

